

CTS-24/42 TRS-MOBILE TEMPORARY ROOF SUPPORT



CTS-24/42 TRS-MOBILE TEMPORARY ROOF SUPPORT

APPLICATION

Temporary roof support (TRS) for Mantis CMR7 Roof bolter
Deployment as a standalone, urgent temporary roof support

FEATURES

Mobile, removable TRS for use with the secondary support,
CMR7 Mantis Bolter in primary support applications
Quick attachment and deployment
Can be towed by LDV into working area
Can be used as a standalone temporary roof support for
emergency support requirements

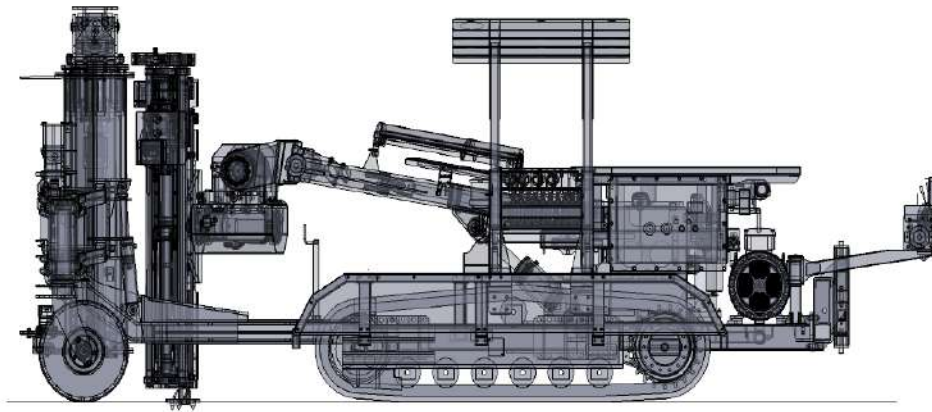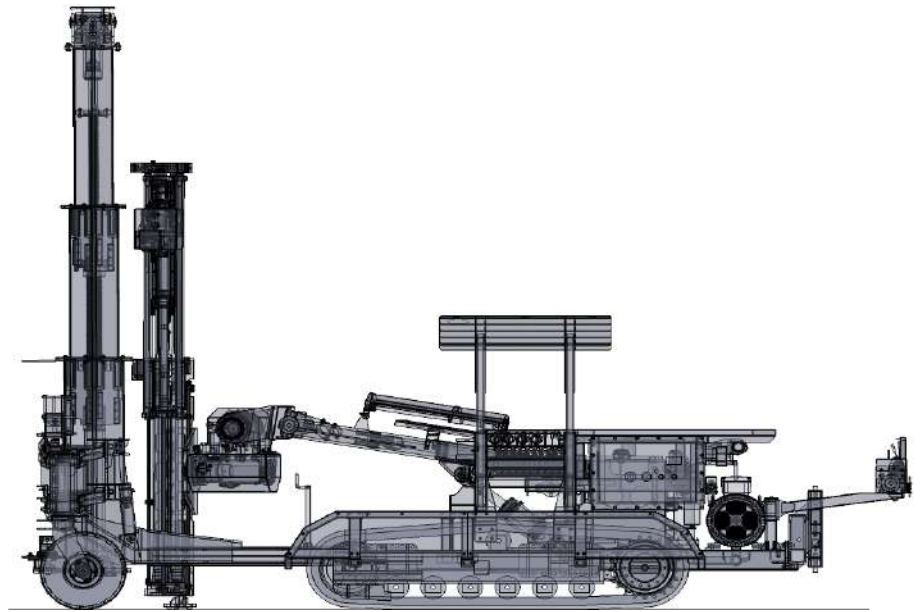

SPECIFICATIONS

Height (collapsed)	2,300 mm
Width	2,073 mm
Transport Height	2,018 mm
Transport Length	2,266 mm
Weight	1,600 kg ref.
Maximum Support Height	4,200 mm
Maximum Support Load	12 tonne
Maximum Roof Setting Load (adjustable to suit roof conditions)	1.5 tonne

SAFETY

P.R. Eng. Certified design
Load Tested

DOCUMENTATION

Operator & Technician manual
Risk Assessment

